


ENCLOSURE CONSTRUCTION GUIDELINES

- NOTES:
- 1.) CABINET/CLOSET AND MOUNTING SURFACE BY OTHERS.
 - 2.) LOCAL FIRE CODES MAY APPLY. THE RESPONSIBILITY TO ENSURE APPLICABLE CODES HAVE BEEN MET IS THAT OF OTHERS.
 - 3.) DOORS, WALLS, AND WALL THICKNESSES SHOWN ARE FOR ILLUSTRATIVE PURPOSES ONLY. ACTUAL DIMENSIONS TO BE FINALIZED BY OTHERS.
 - 4.) DIMENSIONS SHOWN ARE TO PROVIDE FINISHED OPENING SIZES ONLY AND INCLUDE RECOMMENDED MINIMUM CLEARANCES. (DIMENSIONS SUBJECT TO CHANGE WITHOUT NOTICE.)

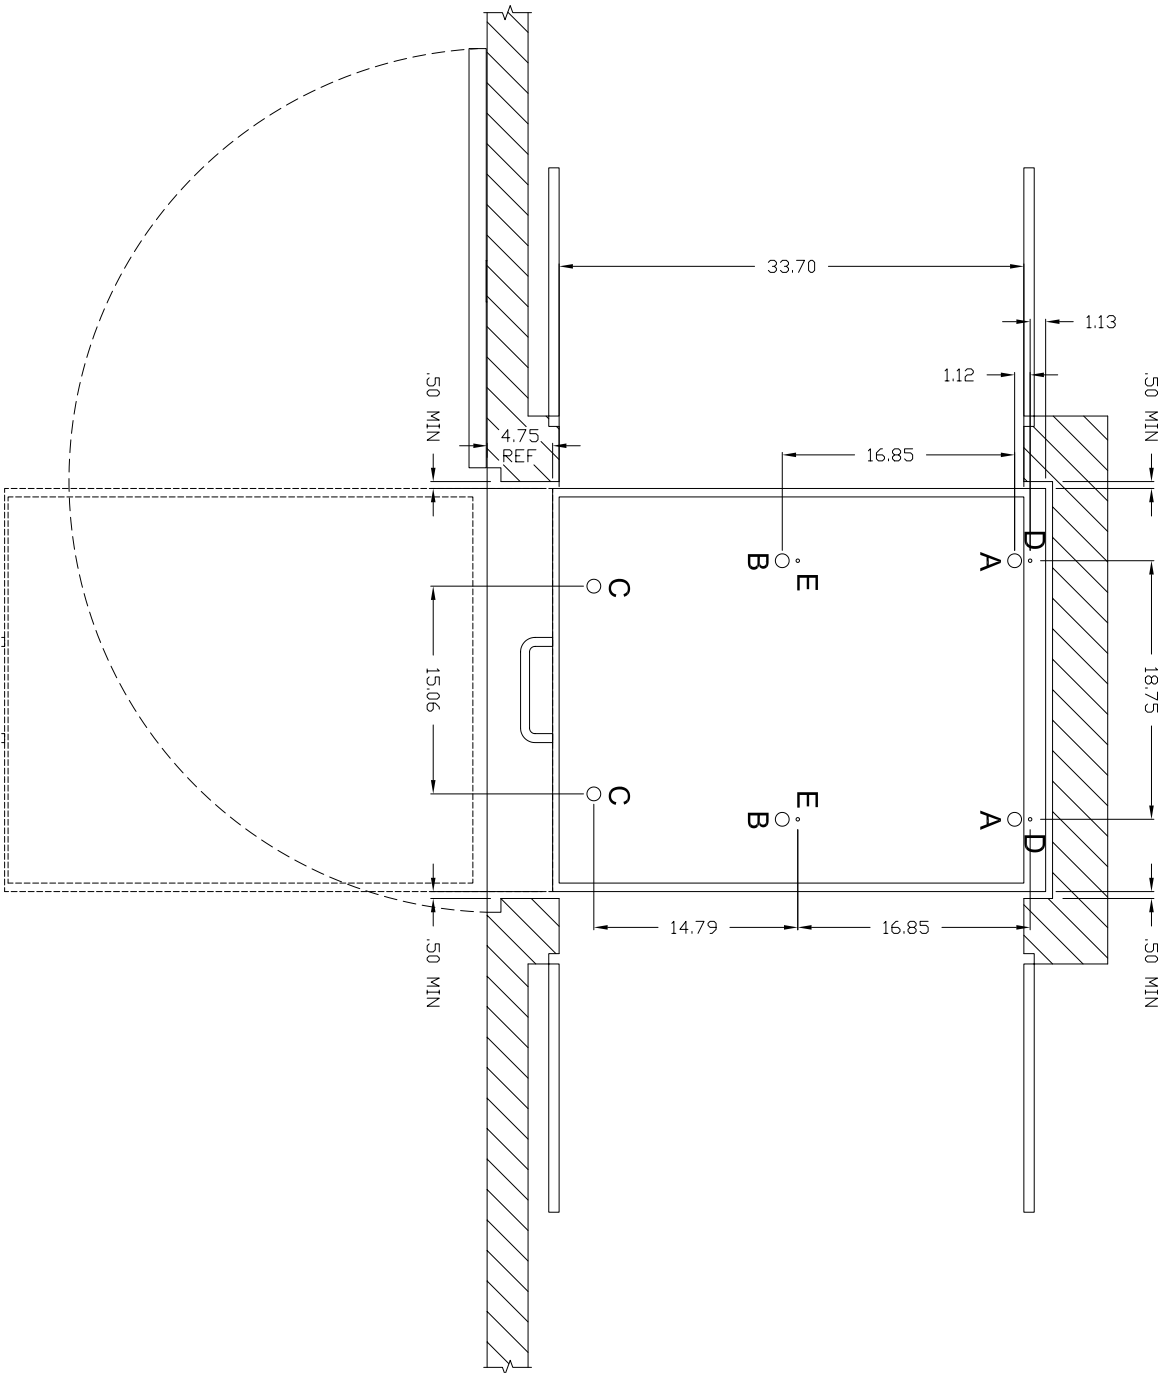


ANCHORING DETAIL
SCALE 2:1

FORCES AT BOLT POINTS & FOOT POINTS


WORST CASE FORCE REQUIREMENTS									
SYSTEM CONFIG	CARRIAGE WIDTH	CARRIAGE LENGTH	LEVELER 'A' SUPPORT	LEVELER 'B' SUPPORT	LEVELER 'C' SUPPORT	ANCHOR 'D' (PULL OUT)	ANCHOR 'E' (PULL OUT)		
DUAL ENTRY SINGLE CARR	28"	33.7"	400	74	900	350	650		
	28"	30"	400	74	900	350	650		
	28"	33.7"	400	74	900	350	650		

(SHELF WEIGHT = 7 LBS/FT LENGTH-WIDTH UNIFORMLY DISTRIBUTED)
DO NOT USE WOOD AS A MOUNTING SUBSTRATE TO AVOID LONG TERM INDENTING

DOUBLE SIDED
SINGLE 28 x 33.7 BASE UNIT CARRIAGE

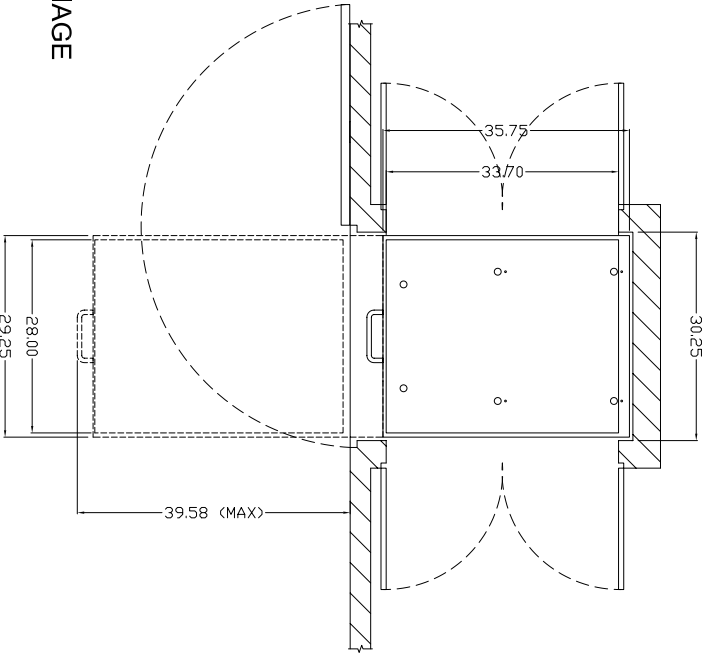

FINISHED OPENING

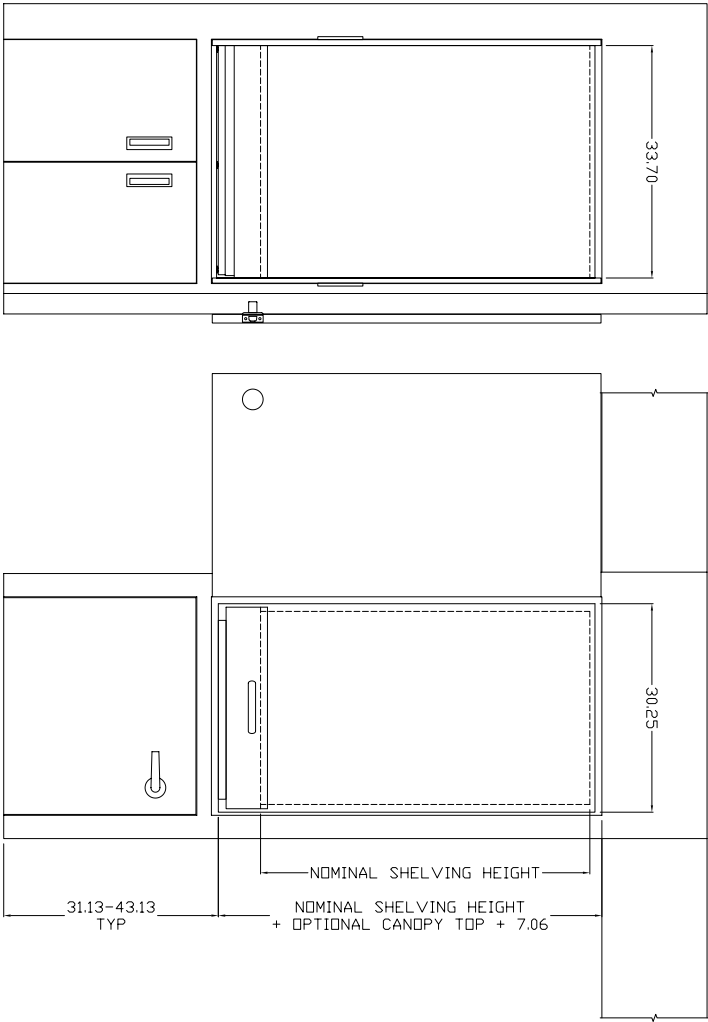

Copyright © 2009 by SpaceSaver Corporation. All rights reserved. This method is proprietary and confidential. Any reproduction, distribution, or use of this information without the express written permission of SpaceSaver Corporation is prohibited. This document is provided for informational purposes only.

TOLERANCES UNLESS OTHERWISE SPECIFIED		TITLE	
XX±.01		CoreSTOR™ PATENT SERVER	
XXX±.005		DOUBLE SIDED 28 X 33.7 GUIDE	
X±.1"			
DWN BY	DATE	SIZE	FSOM NO.
SRH	1/26/09	D	58928
APVD	DATE	SCALE	DWG NO.
		NTS	CoreSTOR DS 28x33.7
			SHEET OF
			REV
			A